




川源(中国)机械有限公司
GSD (China) Co., Ltd.

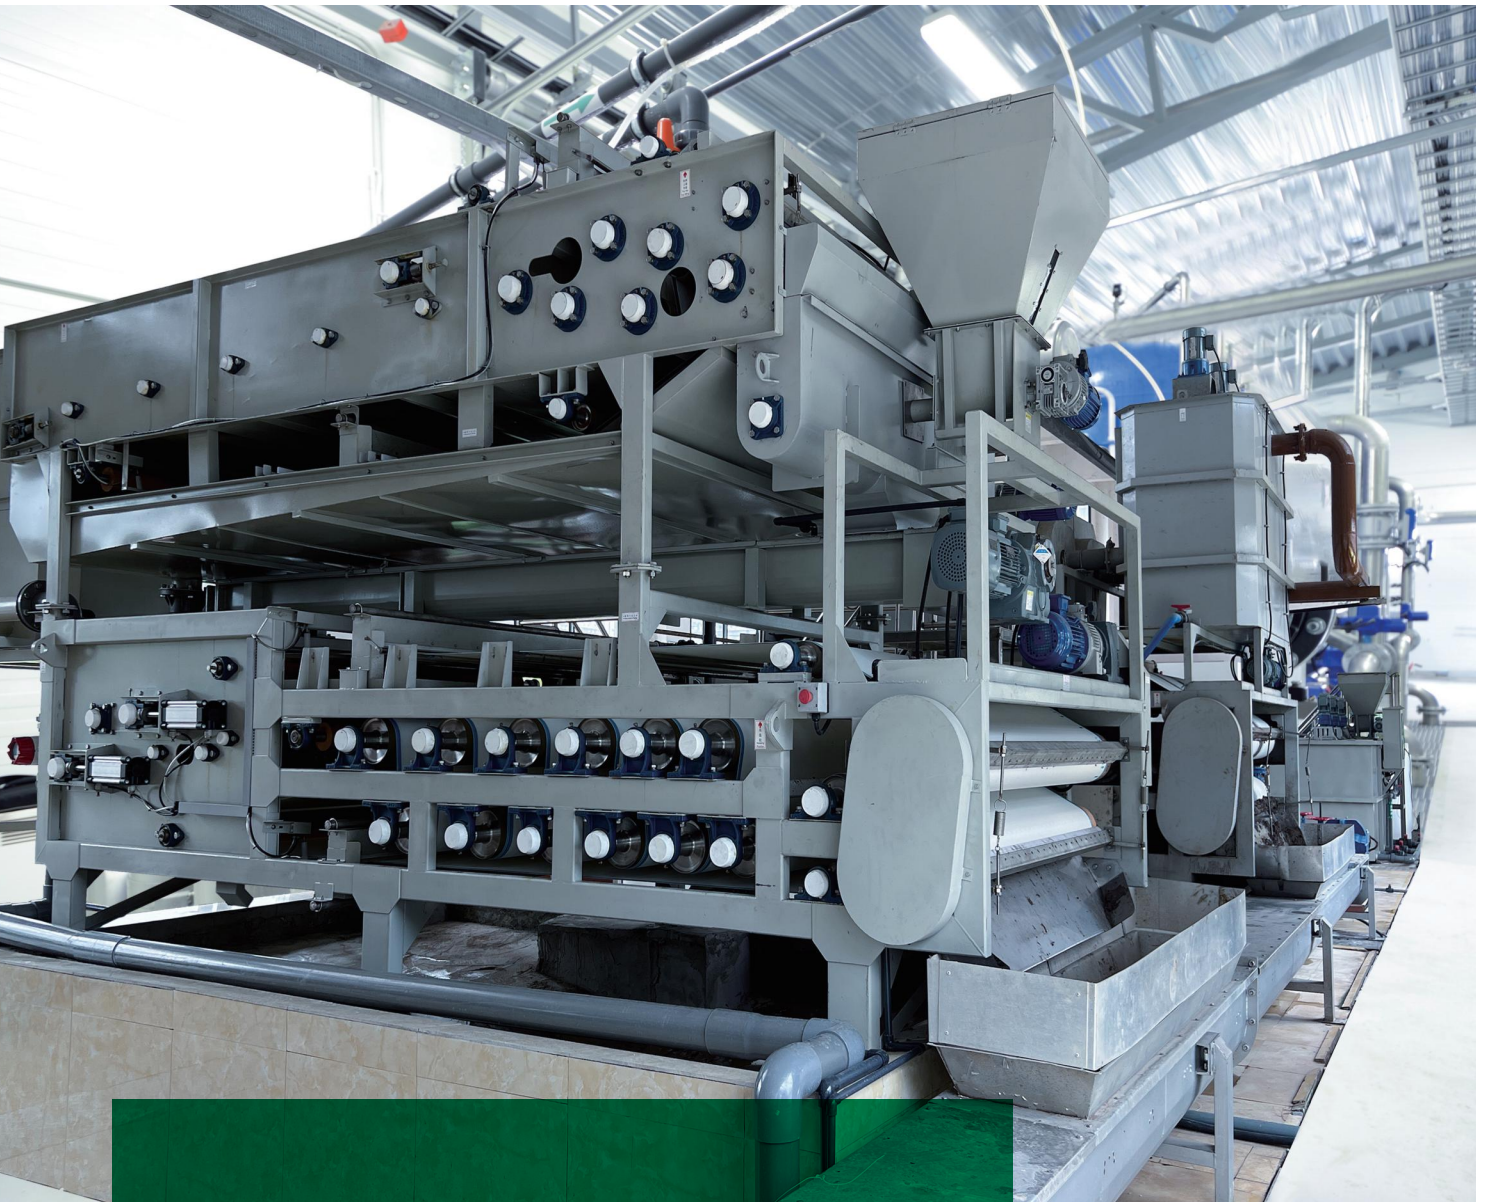

HE4

高干型带式污泥脱水机

High Dryness Belt Filter Press

HE4

高干型带式污泥脱水机

High Dryness Belt Filter Press

- Municipal wastewater sludge dewatering treatment
- Sludge dewatering treatment for slaughtering and animal husbandry
- Sludge dewatering treatment for urban sewers, water and fertilizers, water purification plants
- Solid/liquid separation and dehydration treatment in various industrial processes such as food, chemical, and mining

特点

Features

- 设备集成度高，前端无需一级脱水，污泥池的污泥可直接进入处理
- 自动化程度高，可自动连续运行，可无人值守
- 更合理的滚轮排布，更大的压榨压力与剪切力，出泥含水率更低
- 高压段采用专用滤布，能承受更大的滤布张力，优良的透水性，泥饼易剥离
- 处理效果可匹配不同污泥处置目标

- Highly integrated equipment, no need for primary dewatering at the front end; sludge from sludge tank can be processed directly
- High degree of automation that allows for automatic unattended continuous operation
- More reasonable roller arrangement, greater pressing pressure, lower moisture content of discharged sludge
- Special filter cloth used in the high-pressure section, which can withstand greater tension of the filter cloth, with excellent water permeability for easier stripping of the sludge cake
- Compliance with various usage demands


用途

Application

- 市政污水处理、污泥脱水处理
- 屠宰、畜牧业污泥脱水处理
- 都市下水道、水肥、净水厂污泥脱水处理
- 食品、化工、矿业等各种工业过程中固/液分离脱水处理

结构组成

Structure

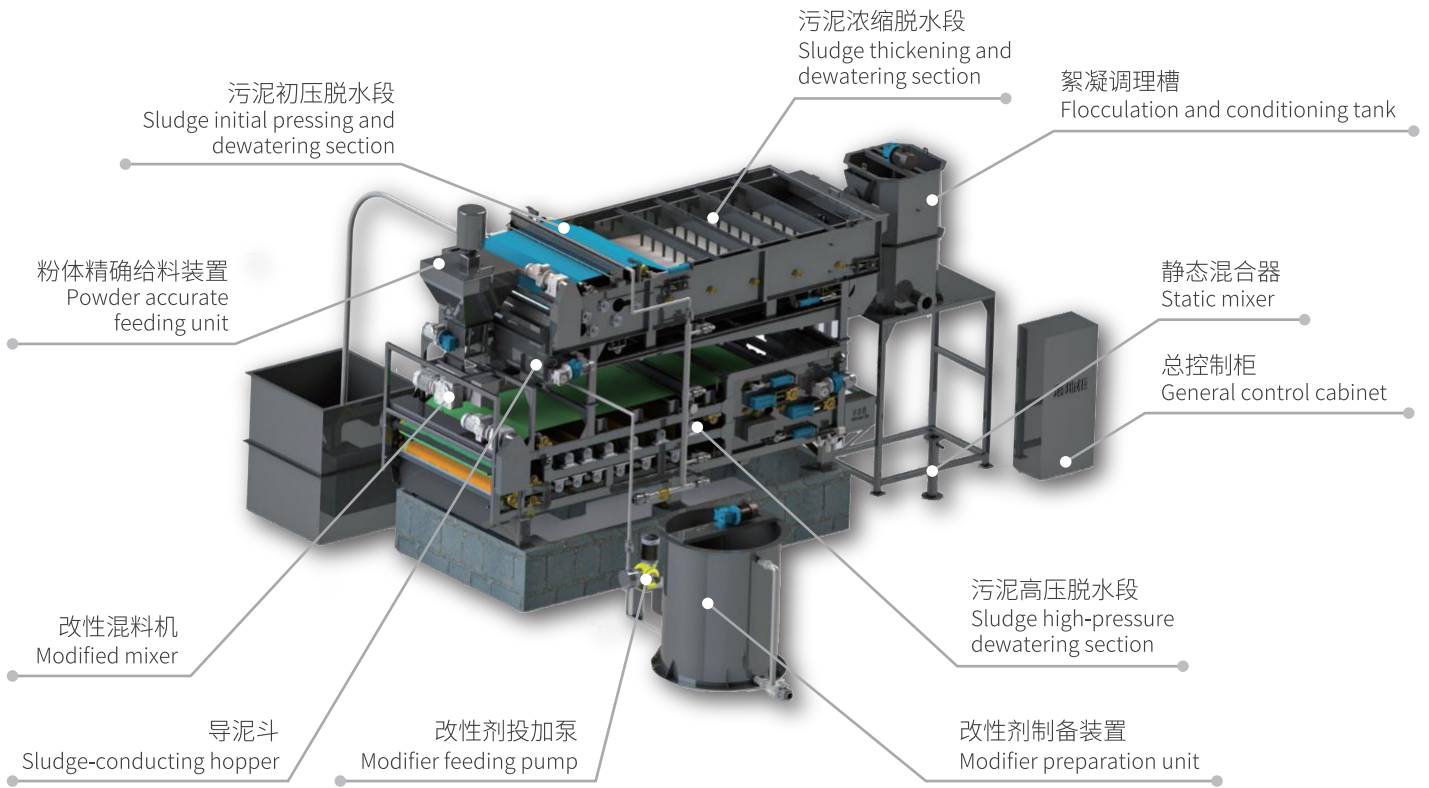


污泥脱水处理效果图

Sludge dewatering treatment effect diagram



脱水前的污泥水
Sludge water before dewatering

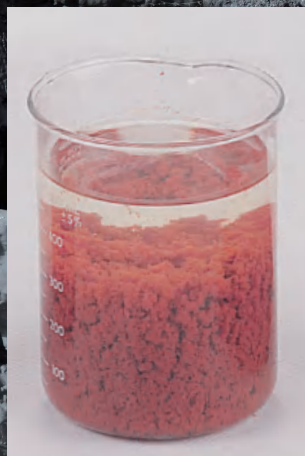

絮凝后的污泥状态
Sludge state after flocculation




脱水后的泥饼
Sludge cake after dewatering

型号说明

Type description

HE4 - 1000

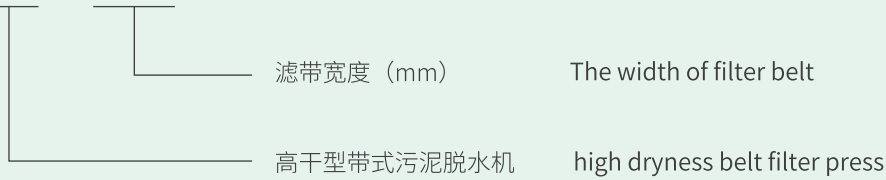


性能参数表

Performance parameter table

型号 Model	滤带宽度 (mm) The width of filter belt	低浓度(S.S.0.4-0.8%) Low concentration		中浓度(S.S.0.8-1.5%) Medium concentration		泥饼含水率 (%) Moisture content of sludge cake	重量 (kg) Weight	清洗水量 (m³/h) Cleaning water volume
		处理量 (m³/h) Treating capacity	绝干量 (kg.DS/h) Dried sludge	处理量 (m³/h) Treating capacity	绝干量 (kg.DS/h) Dried sludge			
HE4-1000	1000	19-25	76-150	15.5-19	124-233	55-75	2850	11
HE4-1500	1500	35-50	152-300	30.5-38	244-458	55-75	4900	20
HE4-2000	2000	60-80	240-480	50-60	400-750	55-75	8400	28

机型 Model	功率 (kW) Power							外形尺寸 (mm) Outline dimension		
	调理槽驱动器 Disposal agitator	浓缩初压段驱动器 Thickening and initial pressing section motor	高压段驱动器 High-pressure section motor	螺旋均泥器驱动器 Screw homogenizer motor	落泥斗搅拌驱动器 Sludge hopper mixing motor	粉体输送驱动器 Powder conveyor motor	改性混合机驱动器 Modified mixer motor	L	W	H
HE4-1000	0.37	0.75	0.75	0.37	0.37	0.37	3	5510	1540	2880
HE4-1500	0.75	0.75	1.5	0.37	0.37	0.37	3	6375	2170	3000
HE4-2000	0.75	1.5	3	0.75	0.75	0.37	5.5	7250	2680	3700

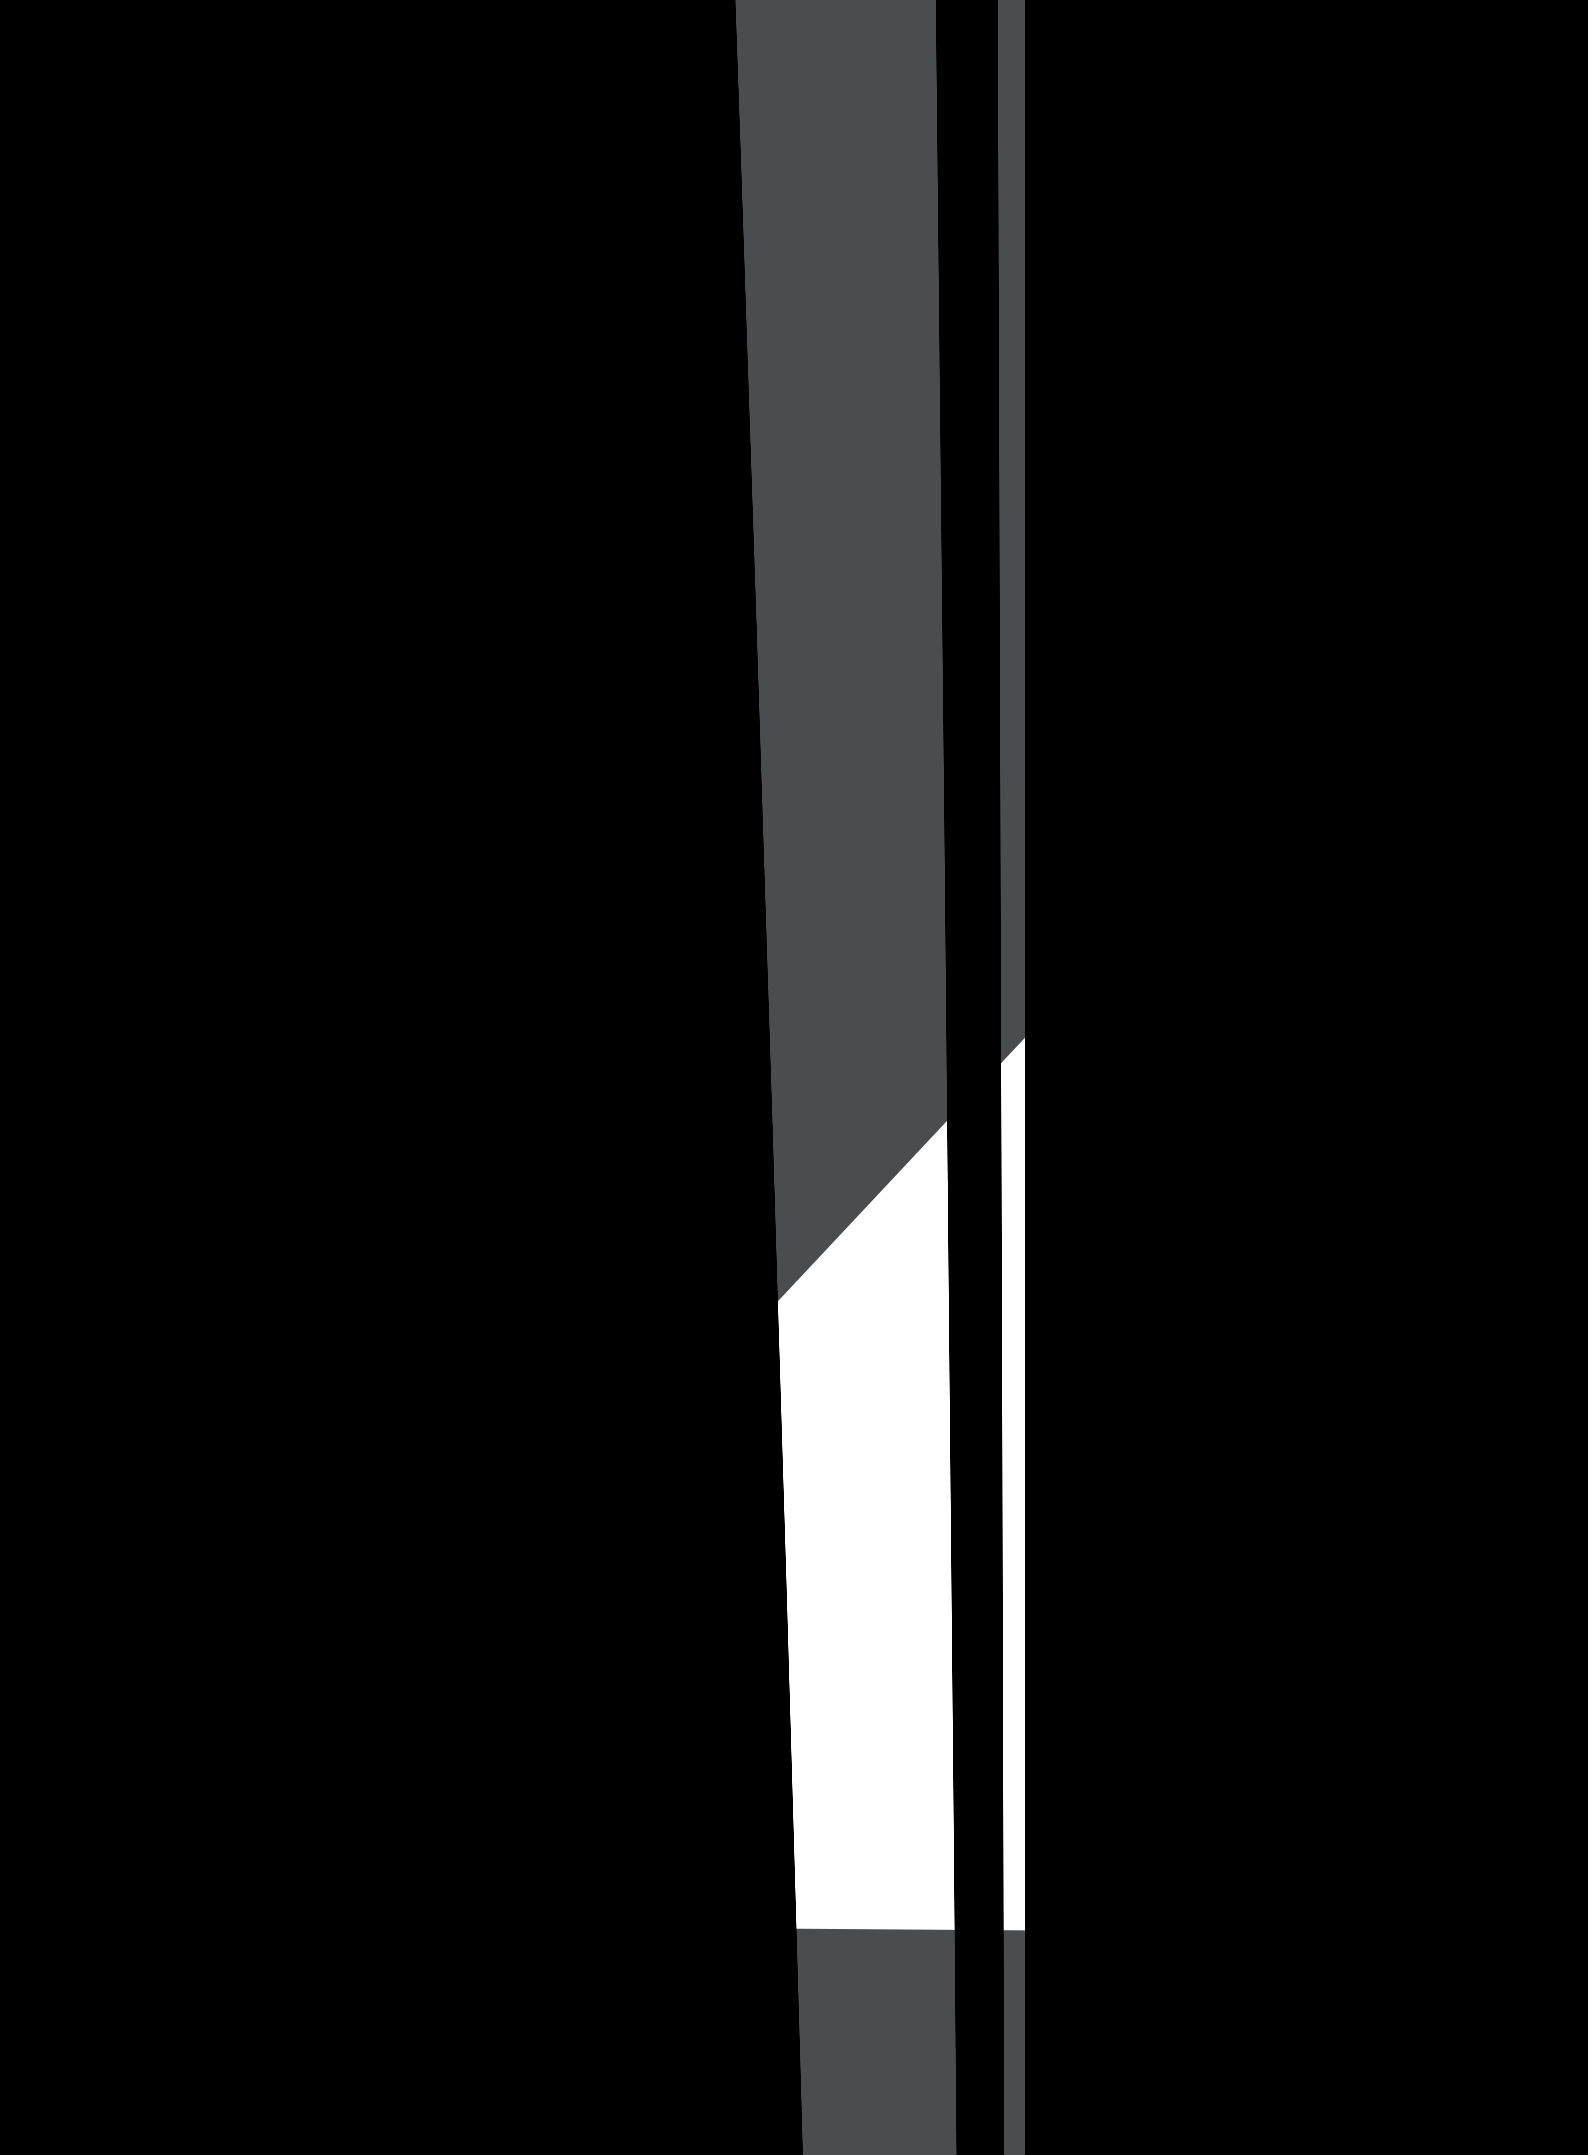



此项目将普通带式脱水机替换为HE4系列高干带机后，每天污泥减量40%以上，大大降低后期处理费用

After replacing the ordinary belt dewatering machine with the HE4 series high-dry belt type dewatering machine in this project, the daily sludge volume is reduced by more than 40%, which has greatly lowered the post-treatment cost.



川源

水处理系统专业合作伙伴

免费咨询电话

400-657-9066

数据来源：公司实验室数据及客户实际使用数据，具体使用环境不同，数据可能存在差异。

The data on the brochure is based on the laboratory testing data and customers' actual operation data in the past. The actual data may be different in different application conditions.

本型录内容如有变更，恕不另行通知。

We reserve the right to change content without notice.

川源（中国）机械有限公司版权所有 all rights reserved. CY-37

